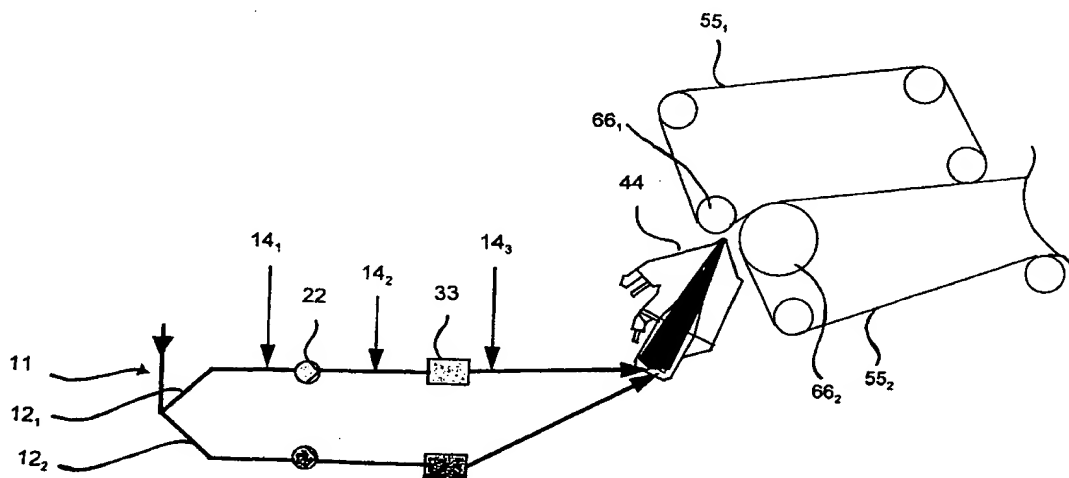


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>D21F 11/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 99/40256</b>
			(43) International Publication Date: 12 August 1999 (12.08.99)
(21) International Application Number: PCT/FI99/00075		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 3 February 1999 (03.02.99)			
(30) Priority Data: 980287                      9 February 1998 (09.02.98)                      FI			
(71) Applicant (for all designated States except US): VALMET CORPORATION [FI/FI]; Panuntie 6, FIN-00620 Helsinki (FI).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): KINNUNEN, Juha, S. [FI/FI]; Hauhontie 35 A 4, FIN-40520 Jyväskylä (FI). KORHONEN, Hannu [FI/FI]; Suluntie 26 B 9, FIN-40340 Jyväskylä (FI). RÄISÄNEN, Kari, Olavi [FI/FI]; Likolamemkatu 3 F 53, FIN-33300 Tampere (FI). VIERTOLA, Mika [FI/FI]; Hukkaperä 2 B 6, FIN-40400 Jyväskylä (FI).			
(74) Agent: FORSSÉN & SALOMAA OY; Yrjönkatu 30, FIN-00100 Helsinki (FI).			

**Published***With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.***(54) Title:** APPLICATION OF A LAYER OF ADMIXTURE IN THE WEB FORMER UNIT OF A BOARD MACHINE**(57) Abstract**

The invention concerns a method for application of a layer of admixture in the web former unit of a board machine. The flow of fresh stock (11) is divided into at least two component stock flows (12<sub>1</sub> and 12<sub>2</sub>), of which flows, to at least one component flow (12<sub>1</sub>), which forms a face which will be placed against the face of the layer to be combined with it, at a point (14<sub>1</sub>) before the pump (22), at a point (14<sub>2</sub>), and/or at a point (14<sub>3</sub>) after the machine screen, admixtures are added in order to increase the contents of fines in the layers and the bonding strength between the faces, and after this the component flows (12<sub>1</sub> and 12<sub>2</sub>) are passed into the multi-layer headbox (44) and further into the gap former.